

2D PLAN FOR STAAD PRO



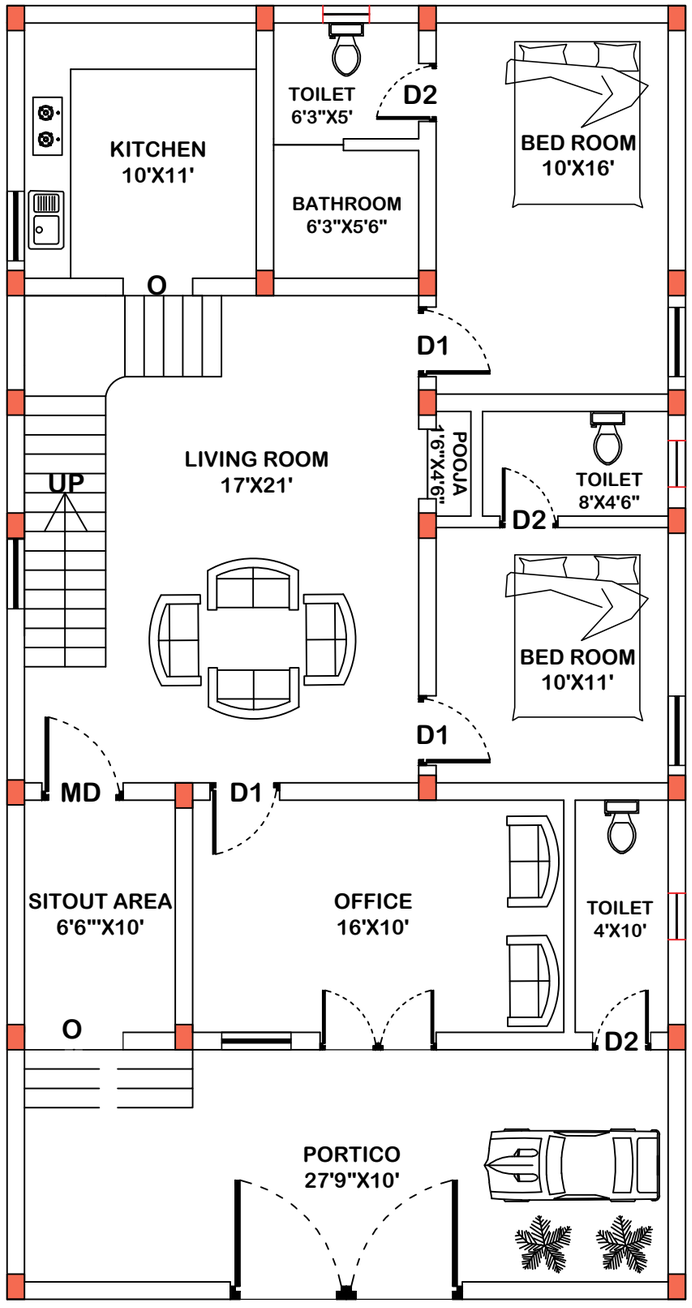

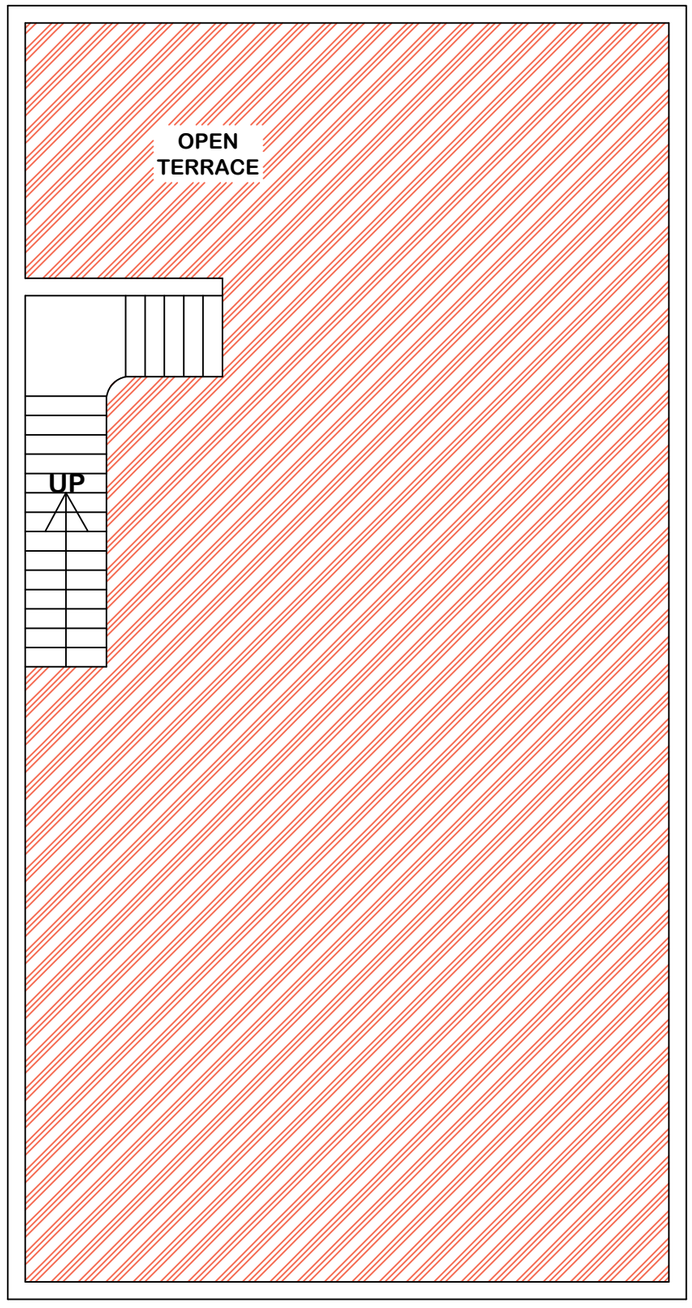

C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

E25031

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON

COLLEGE:
GCE, ERODE

COURSE:
STAAD PRO

BUILDING PLOTTED AREA:
1333.75SQ.FT

DATE:
09/01/2026

NOTE:

1. It Includes Footings, Beam, Column, Reaction, 3D Designs in STAAD PRO

Ccube Final Project.STD - STAAD.Pro CONNECT Edition

File | Geometry | View | Select | Specification | Loading | Analysis and Design | Utilities

Search | Sign in

Clipboard | Structure | Node | Beam | Plate | Solid | Physical Member | Composite Deck


Grids | Structure Wizard | Move Node | Merge Nodes | Renumber Nodes | Add Beam | Beam Layout | Insert Node | Stretch Beam | Add Plate | Plate Layout | Parametric Models | Generate Mesh | Add Solid | Solid Layout | Move Solids | Renumber Solids | Physical Member Layout | Toggle Physical Member mode | Form | Auto Form | Composite Deck Layout

Workflow

- Analytical Modeling
- Physical Modeling
- Building Planner
- Piping
- Bridge Deck
- Postprocessing
- Foundation Design
- Steel AutoDrafter
- Connection Design
- Concrete Design
- Advanced Concrete Desi...
- Advanced Slab Design
- Earthquake

Analytical Modeling: Geometry | Properties | Materials | Specifications | Supports | Loading | Analysis | Design

Ccube Final Project - Whole Structure

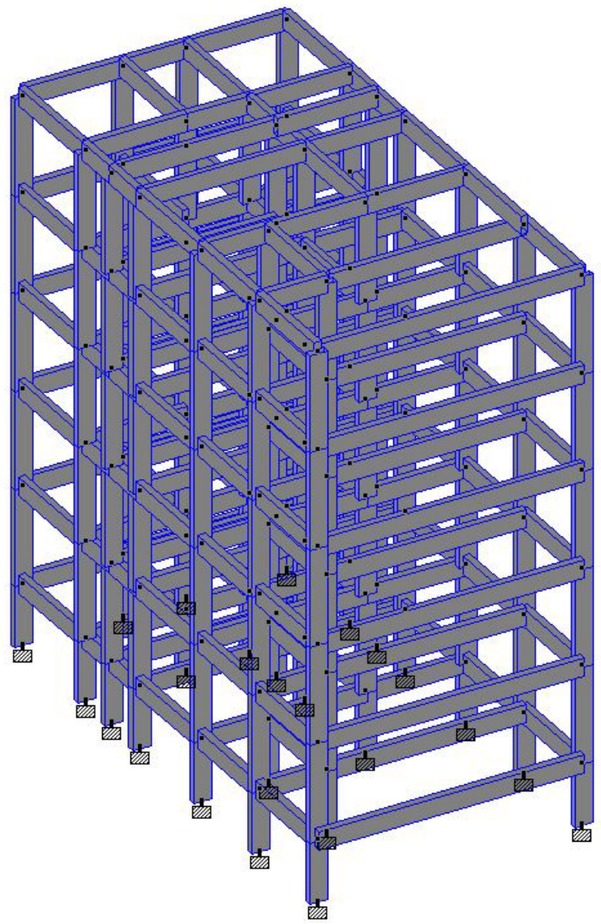

Load 1

Ccube Final Pr...

Node	X m	Y m	Z m
1	0.000	0.000	0.000
2	3.300	0.000	0.000
3	5.400	0.000	0.000
4	8.700	0.000	0.000
5	0.000	0.000	3.600
6	0.000	0.000	5.100
7	0.000	0.000	6.700
8	0.000	0.000	10.200
9	0.000	0.000	13.500
10	0.000	0.000	16.800
11	3.300	0.000	3.600
12	5.400	0.000	3.600
13	8.700	0.000	3.600
14	5.400	0.000	5.100
15	8.700	0.000	5.100
16	5.400	0.000	6.700
17	8.700	0.000	6.700
18	2.200	0.000	10.200
19	5.400	0.000	10.200
20	8.700	0.000	10.200
21	2.200	0.000	13.500

Ccube Final Pr...

Beam	Node A	Node B	Property Refn.
32	1	24	1
33	2	25	1
34	3	26	1
35	4	27	1
36	5	28	1
37	6	29	1
38	7	30	1
39	8	31	1
40	9	32	1
41	10	33	1
42	11	34	1
43	12	35	1
44	13	36	1
45	14	37	1
46	15	38	1
47	16	39	1
48	17	40	1
49	18	41	1
50	19	42	1
51	20	43	1

Analytical Modeling Workflow | Load : 1: DL | Input Units : kN-m

Ccube Final Project.STD - STAAD.Pro CONNECT Edition

File | Geometry | View | Select | Specification | Loading | Analysis and Design | Utilities

Search | Sign in

Labels: Label Settings

Tools: Zoom Window | Display Whole Structure

Views: Open View | New View | Selected Objects | View Management


Options: Display Options | Set Structure Colors | Structural Tooltip Options

Windows: Cascade | Tile Horizontal | Tile Vertical | Structure Only | Tables | 3D Rendering

Workflow


- Analytical Modeling
- Physical Modeling
- Building Planner
- Piping
- Bridge Deck
- Postprocessing
- Foundation Design
- Steel AutoDrafter
- Connection Design
- Concrete Design
- Advanced Concrete Desi...
- Advanced Slab Design
- Earthquake


Analytical Modeling: Geometry | Properties | Materials | Specifications | Supports | Loading | Analysis | Design

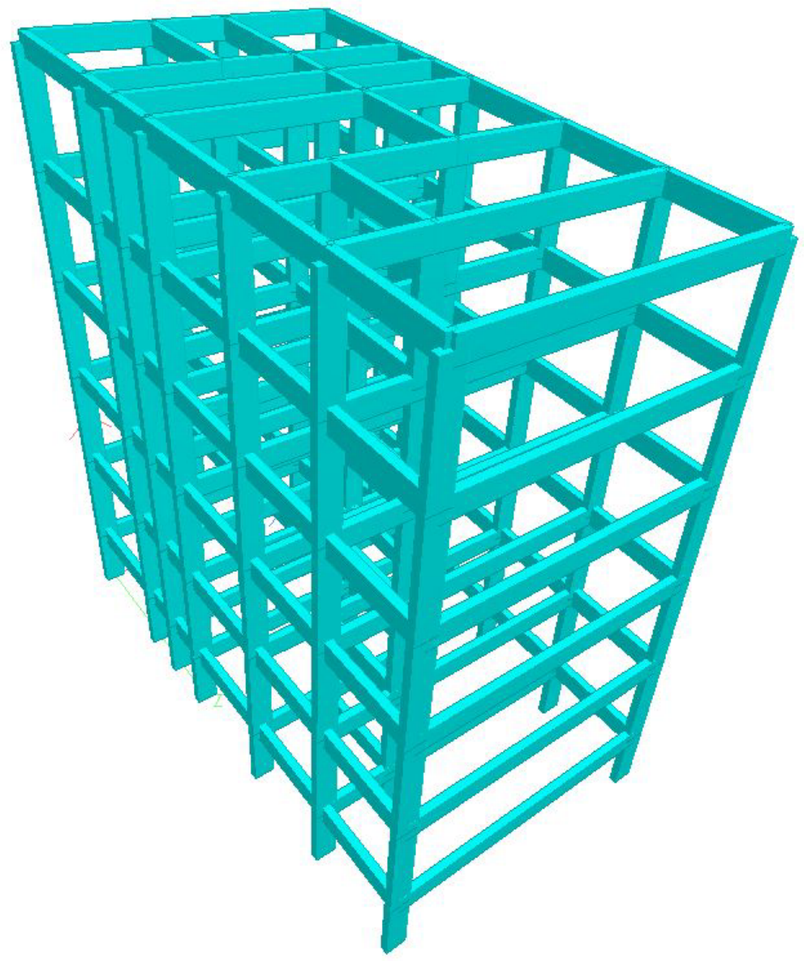


Analytical Modeling Workflow | Load : 1: DL | Input Units : kN-m

FOOTING DETAILS

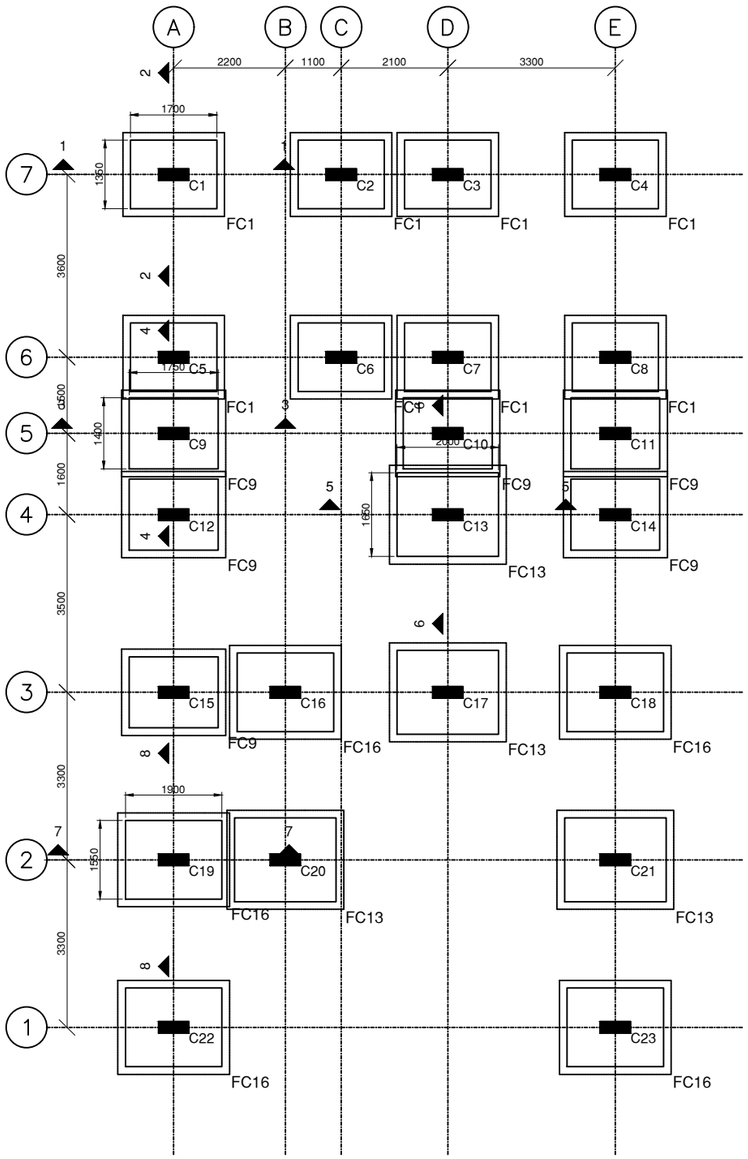





SECTION 1-1
DETAIL OF FOOTING FC1
(SCALE 1:25)




SECTION 2-2
DETAIL OF FOOTING FC1
(SCALE 1:25)




FOOTING FC1- PLAN
(SCALE 1:25)



SECTION 3-3
DETAIL OF FOOTING FC9
(SCALE 1:25)



SECTION 4-4
DETAIL OF FOOTING FC9
(SCALE 1:25)



FOOTING FC9- PLAN
(SCALE 1:25)



C CUBE
CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON

COLLEGE:
GCE, ERODE

COURSE:
STAAD PRO


NOTES:

1. All dimensions are All dimensions are in meters (m).
2. Concrete grade: Concrete grade: M25.
3. Reinforcement Reinforcement steel: Fe550.
4. Reinforcement Reinforcement details shall be as per structural drawings.
5. Concrete work Concrete work shall conform to IS 456: 2000 and reinforcement to IS 1786: 2008.
6. Minimum curing Minimum curing 14days


FOOTING DETAILS

FOOTING SCHEDULE (M25:Fe500)


FOOTING NUMBERS	COLUMN NUMBERS	FOOTING TYPE	FOOTING DIMENSION					FOOTING REINFORCEMENT				STIRRUPS		SFR	REMARKS
								BOTTOM		TOP					
			STEP	L	B	D1	D2	ALONG B	ALONG L	ALONG B	ALONG L	ALONG B	ALONG L		
FC1	C1,C2,C3,C4, C5,C6,C7,C8	Pad	-	1700	1350	425	-	T10@160 C/C	T10@170 C/C	-	-	-	-	-	-
FC9	C9,C10,C11,C12, C14,C15	Pad	-	1750	1400	450	-	T10@150 C/C	T10@160 C/C	-	-	-	-	-	-
FC13	C13,C17,C20,C21	Pad	-	2000	1650	525	-	T10@125 C/C	T10@130 C/C	-	-	-	-	-	-
FC16	C16,C18,C19,C22, C23	Pad	-	1900	1550	475	-	T10@150 C/C	T10@145 C/C	-	-	-	-	-	-




SECTION 5-5
DETAIL OF FOOTING FC13
(SCALE 1:25)




SECTION 6-6
DETAIL OF FOOTING FC13
(SCALE 1:25)




FOOTING FC13- PLAN
(SCALE 1:25)



SECTION 7-7
DETAIL OF FOOTING FC16
(SCALE 1:25)



SECTION 8-8
DETAIL OF FOOTING FC16
(SCALE 1:25)



FOOTING FC16- PLAN
(SCALE 1:25)



C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON

COLLEGE:
GCE, ERODE

COURSE:
STAAD PRO


NOTES:

1. All dimensions are All dimensions are in meters (m).
2. Concrete grade: Concrete grade: M25.
3. Reinforcement Reinforcement steel: Fe550.
4. Reinforcement Reinforcement details shall be as per structural drawings.
5. Concrete work Concrete work shall conform to IS 456: 2000 and reinforcement to IS 1786: 2008.
6. Minimum curing Minimum curing 14days

BEAM DETAILS

BEAM SCHEDULE (M25:Fe415) (LEVEL: 8.4m,11.6m,14.8m,18m)


BEAM NUMBERS	SIZE		BOTTOM REINFORCEMENT			TOP REINFORCEMENT			SHEAR STIRRUPS			SFR	DIAGONAL	REMARKS
	B	D	LEFT	MID SPAN	RIGHT	LEFT	MID SPAN	RIGHT	LEFT	MID SPAN	RIGHT			
B1,B3,B4,B6,B11 ,B13	230	600	3-T12	3-T12	3-T12	2-T16	2-T16	2-T16	6-2L-T8@185 C/C	4-2L-T8@185 C/C	6-2L-T8@185 C/C	2-T8EF	-	-
B2,B5,B12	230	600	3-T12	3-T12	3-T12	2-T16	2-T16	2-T16	4-2L-T8@185 C/C	2-2L-T8@185 C/C	4-2L-T8@185 C/C	2-T8EF	-	-
B7,B9,B14	230	600	2-T16	3-T16	2-T16	2-T25	2-T16	+ 2-T20 2-T20	10-2L-T8@185 C/C	8-2L-T8@185 C/C	10-2L-T8@185 C/C	2-T8EF	-	-
B8,B10,B15	230	600	2-T16	+ 3-T16 2-T12	2-T16	+ 2-T20 2-T20	2-T16	+ 2-T20 2-T20	6-2L-T8@180 C/C	4-2L-T8@185 C/C	6-2L-T8@185 C/C	2-T8EF	-	-
B16,B23,B24	230	600	2-T16	+ 3-T16 3-T12	2-T16	+ 2-T25 2-T20	2-T16	+ 2-T25 2-T25	16-2L-T8@185 C/C	8-2L-T8@300 C/C	16-2L-T8@185 C/C	2-T8EF	-	-
B17,B25,B29	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	7-2L-T8@185 C/C	5-2L-T8@185 C/C	7-2L-T8@185 C/C	2-T8EF	-	-
B18,B19,B30,B31	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	7-2L-T8@185 C/C	3-2L-T8@300 C/C	7-2L-T8@185 C/C	2-T8EF	-	-
B20,B21,B32,B33	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	3-2L-T8@300 C/C	1-2L-T8@300 C/C	3-2L-T8@300 C/C	-	-	-
B22,B34	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	8-2L-T8@185 C/C	3-2L-T8@300 C/C	8-2L-T8@185 C/C	2-T8EF	-	-
B26,B27	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	3-2L-T8@300 C/C	2-2L-T8@185 C/C	4-2L-T8@185 C/C	2-T8EF	-	-
B28	230	600	3-T12	3-T12	3-T12	3-T12	3-T12	3-T12	5-2L-T8@300 C/C	3-2L-T8@300 C/C	5-2L-T8@300 C/C	-	-	-

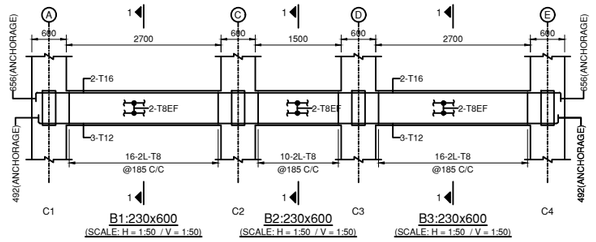


B1:230x600 (SCALE: H = 1:50 / V = 1:50)

B2:230x600 (SCALE: H = 1:50 / V = 1:50)


B3:230x600 (SCALE: H = 1:50 / V = 1:50)




B1 (SCALE 1:25)



B2 (SCALE 1:25)




B3 (SCALE 1:25)

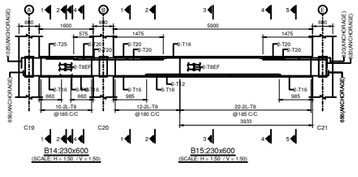

B14:230x600 (SCALE: H = 1:50 / V = 1:50)

B15:230x600 (SCALE: H = 1:50 / V = 1:50)

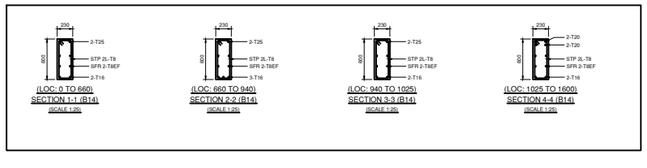


(LOC: 0 TO 660) SECTION 1-1 (B14) (SCALE 1:25)

(LOC: 660 TO 940) SECTION 2-2 (B14) (SCALE 1:25)

(LOC: 940 TO 1025) SECTION 3-3 (B14) (SCALE 1:25)

(LOC: 1025 TO 1600) SECTION 4-4 (B14) (SCALE 1:25)

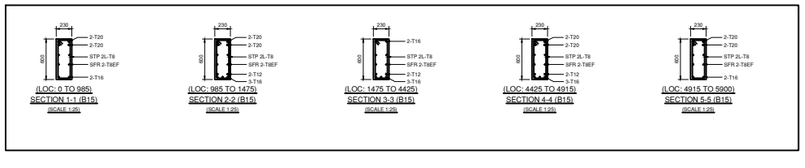

(LOC: 0 TO 985) SECTION 1-1 (B15) (SCALE 1:25)

(LOC: 985 TO 1475) SECTION 2-2 (B15) (SCALE 1:25)

(LOC: 1475 TO 4425) SECTION 3-3 (B15) (SCALE 1:25)

(LOC: 4425 TO 4915) SECTION 4-4 (B15) (SCALE 1:25)

(LOC: 4915 TO 5900) SECTION 5-5 (B15) (SCALE 1:25)



C CUBE CAD CENTRE DIVISION OF C CUBE TECHNOLOGIES

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON

COLLEGE:
GCE, ERODE

COURSE:
STAAD PRO

NOTES:

1. All dimensions are All dimensions are in meters (m).
2. Concrete grade: Concrete grade: M25.
3. Reinforcement Reinforcement steel: Fe550.
4. Reinforcement Reinforcement details shall be as per structural drawings.
5. Concrete work Concrete work shall conform to IS 456: 2000 and reinforcement to IS 1786: 2008.
6. Minimum curing Minimum curing 14days

COLUMN DETAILINGS

14.8M TO 18M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T16 T12 8-T16 + 2-T12
11.6M TO 14.8M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12
8.4M TO 11.6M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12
5.2M TO 8.4M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T16 T12 4-T16 + 2-T12
2M TO 5.2M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T16 T12 4-T16 + 2-T12
0M TO 2M	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T12 6-T12	M25 : Fe415 , COVER = 50MM LINKS T8 @ 175 230 600 T16 T12 4-T16 + 4-T12
COLUMN MARKED	C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19	C20, C21, C22, C23

COLUMN AND WALL SCHEDULE
(SCALE 1:25)

14.8M TO 18M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	8-T16 + 2-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
11.6M TO 14.8M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	6-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
8.4M TO 11.6M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	6-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
5.2M TO 8.4M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	4-T16 + 2-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
2M TO 5.2M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	4-T16 + 2-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
0M TO 2M	SIZE	230 X 600	230 X 600
	STEEL	6-T12	4-T16 + 4-T12
	LINKS	T8@175 C/C	T8@175 C/C
	MATERIAL	M25:Fe415	M25:Fe415
	SCR ZONE	-	-
COLUMN MARKED		C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19	C20, C21, C22, C23

COLUMN SCHEDULE



C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON


COLLEGE:
GCE, ERODE

COURSE:
STAAD PRO

NOTES:


1. All dimensions are All dimensions are in meters (m).
2. Concrete grade: Concrete grade: M25.
3. Reinforcement Reinforcement steel: Fe550.
4. Reinforcement Reinforcement details shall be as per structural drawings.
5. Concrete work Concrete work shall conform to IS 456: 2000 and reinforcement to IS 1786: 2008.
6. Minimum curing Minimum curing 14days

COLUMN DETAILINGS

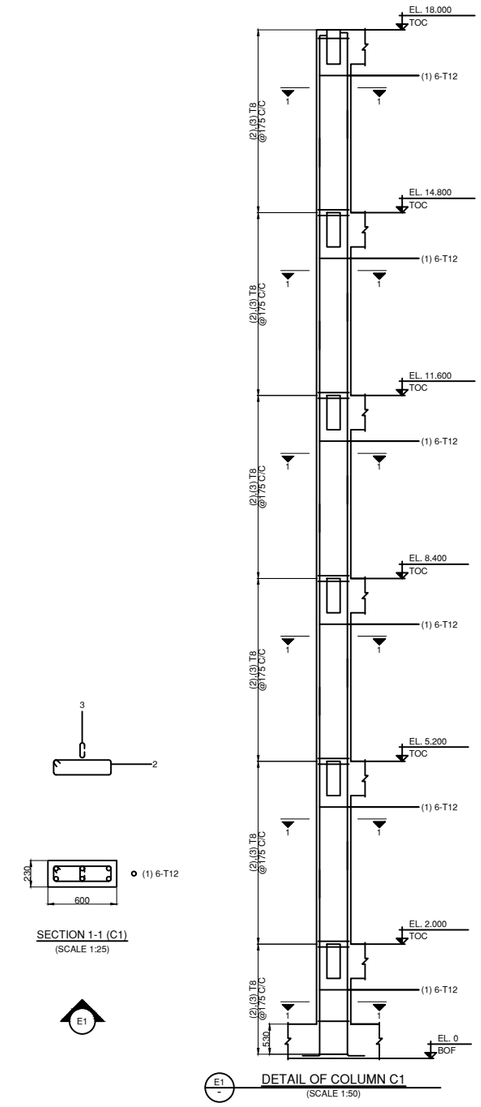


DETAIL OF COLUMN C1
(SCALE 1:50)


SECTION 1-1 (C1)
(SCALE 1:25)




SECTION 3-3 (C22)
(SCALE 1:25)




SECTION 1-1 (C22)
(SCALE 1:25)

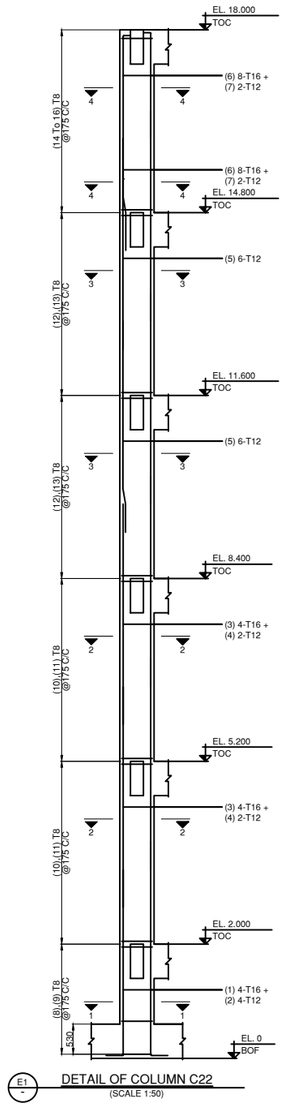

DETAIL OF COLUMN C22
(SCALE 1:50)



SECTION 4-4 (C22)
(SCALE 1:25)



SECTION 2-2 (C22)
(SCALE 1:25)



C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

PROJECT TYPE:
RESIDETIAL BUILDING

DEPARTMENT:
CIVIL ENGINEERING

NAME:
LOKESH PON


COLLEGE:
GCE, ERODE


COURSE:
STAAD PRO

NOTES:

1. All dimensions are All dimensions are in meters (m).
2. Concrete grade: Concrete grade: M25.
3. Reinforcement Reinforcement steel: Fe550.
4. Reinforcement Reinforcement details shall be as per structural drawings.
5. Concrete work Concrete work shall conform to IS 456: 2000 and reinforcement to IS 1786: 2008.
6. Minimum curing Minimum curing 14days

BEAM RESULT

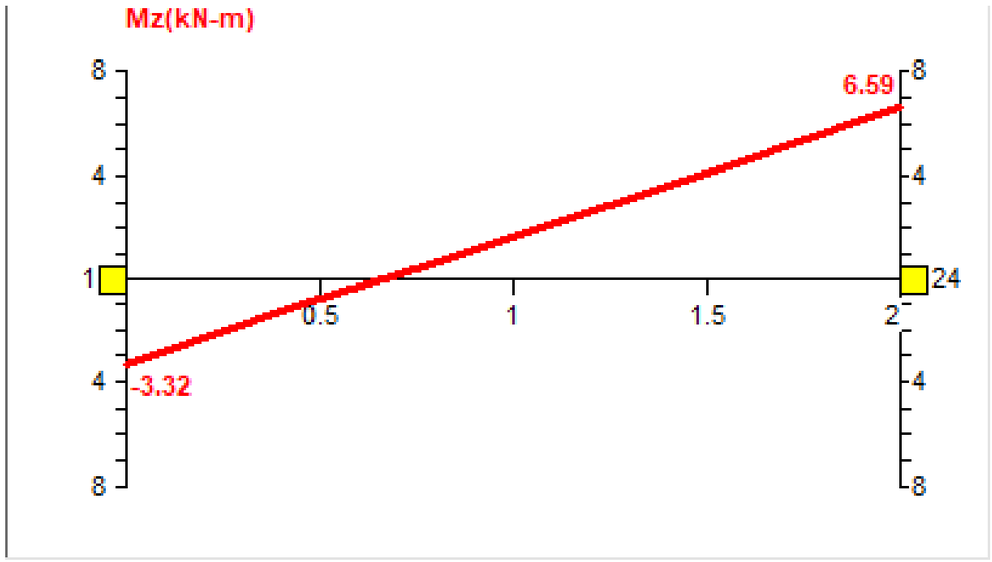

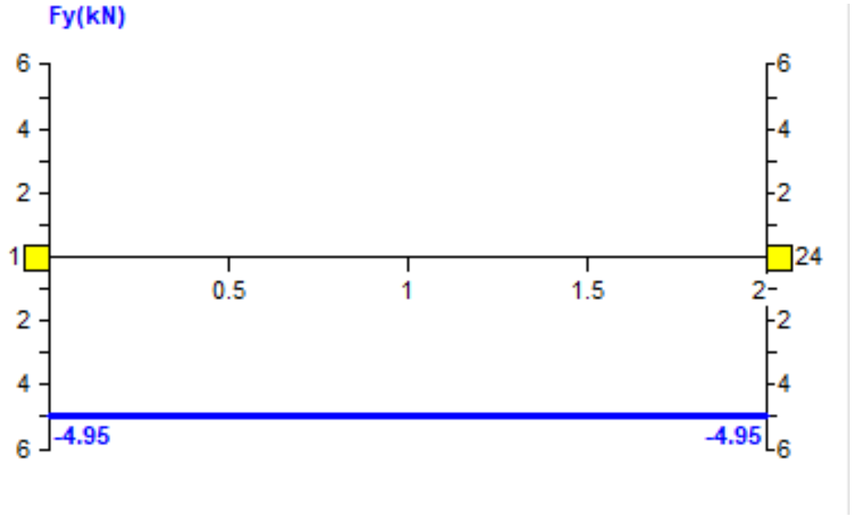

	Beam	L/C	Node	Fx kN	Fy kN	Fz kN	Mx kN-m	My kN-m	Mz kN-m
Max Fx	52	7 ULC, 1.5 DEAD + 1.5 LIVE	21	1541.333	-19.556	-2.729	-0.004	2.004	-12.029
Min Fx	359	7 ULC, 1.5 DEAD + 1.5 LIVE	67	-21.456	188.37	-0.01	-0.813	-0.009	196.983
Max Fy	359	7 ULC, 1.5 DEAD + 1.5 LIVE	67	-21.456	188.37	-0.01	-0.813	-0.009	196.983
Min Fy	368	7 ULC, 1.5 DEAD + 1.5 LIVE	137	-8.434	-177.17	-0.093	-0.492	-0.188	204.71
Max Fz	141	7 ULC, 1.5 DEAD + 1.5 LIVE	48	623.532	1.383	7.836	-0.088	-12.489	2.54
Min Fz	266	7 ULC, 1.5 DEAD + 1.5 LIVE	111	419.4	3.416	-8.666	-0.231	13.875	5.639
Max Mx	295	7 ULC, 1.5 DEAD + 1.5 LIVE	133	-2.364	89.551	-0.577	5.755	0.852	48.675
Min Mx	294	7 ULC, 1.5 DEAD + 1.5 LIVE	123	-1.231	51.7	-0.69	-5.525	1.188	28.876
Max My	266	7 ULC, 1.5 DEAD + 1.5 LIVE	111	419.4	3.416	-8.666	-0.231	13.875	5.639
Min My	266	7 ULC, 1.5 DEAD + 1.5 LIVE	134	403.793	3.416	-8.666	-0.231	-13.855	-5.292
Max Mz	298	7 ULC, 1.5 DEAD + 1.5 LIVE	138	-16.045	-174.575	0.147	0.718	0.635	255.674
Min Mz	324	7 ULC, 1.5 DEAD + 1.5 LIVE	161	162.032	93.022	-7.85	0.427	-12.627	-164.636

DONE BY: LOKESH PON

REACTION RESULT

C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

DONE BY: LOKESH PON

	Column1	Column2	Horizontal	Vertical	Horizontal3	Moment	Column4	Column5
	Node	L/C	Fx kN	Fy kN	Fz kN	Mx kN-m	My kN-m	Mz kN-m
Max Fx	10	21 ULC, 1.5 DEAD + -1.5 WIND (1)	49.354	1102.34	-2.676	-1.891	-0.038	-33.357
Min Fx	23	18 ULC, 1.5 DEAD + 1.5 WIND (2)	-50.545	1155.757	-3.551	-2.376	-0.125	36.05
Max Fy	21	7 ULC, 1.5 DEAD + 1.5 LIVE	19.556	1541.333	-2.729	-2.004	-0.004	-12.029
Min Fy	9	3 WIND +X	-3.712	-15.539	-0.142	-0.155	-0.031	4.859
Max Fz	2	23 ULC, 1.5 DEAD + -1.5 WIND (3)	-1.823	823.681	7.372	5.107	-0.034	0.51
Min Fz	11	19 ULC, 1.5 DEAD + 1.5 WIND (3)	-2.202	940.446	-6.724	-5.531	-0.019	1.379
Max Mx	2	23 ULC, 1.5 DEAD + -1.5 WIND (3)	-1.823	823.681	7.372	5.107	-0.034	0.51
Min Mx	11	19 ULC, 1.5 DEAD + 1.5 WIND (3)	-2.202	940.446	-6.724	-5.531	-0.019	1.379
Max My	20	22 ULC, 1.5 DEAD + -1.5 WIND (2)	-1.555	1011.593	-0.358	-0.466	0.069	-2.098
Min My	23	17 ULC, 1.5 DEAD + 1.5 WIND (1)	-50.007	1155.757	-3.551	-2.377	-0.13	35.923
Max Mz	23	18 ULC, 1.5 DEAD + 1.5 WIND (2)	-50.545	1155.757	-3.551	-2.376	-0.125	36.05
Min Mz	10	21 ULC, 1.5 DEAD + -1.5 WIND (1)	49.354	1102.34	-2.676	-1.891	-0.038	-33.357

DISPLACEMENT RESULT

C CUBE CAD CENTRE
DIVISION OF C CUBE TECHNOLOGIES

DONE BY: LOKESH PON

	Column1	Column2	Horizontal	Vertical	Horizontal3	Resultant	Rotational	Column4	Column5
	Node	L/C	X mm	Y mm	Z mm	mm	rX rad	rY rad	rZ rad
Max X	148	17 ULC, 1.5 DEAD + 1.5 WIND (1)	2.606	-3.552	1.925	4.808	0	0	-0.001
Min X	153	22 ULC, 1.5 DEAD + -1.5 WIND (2)	-1.02	-2.29	1.298	2.823	0	0	0
Max Y	101	4 WIND -X	0.677	0.029	0.109	0.686	0	0	0
Min Y	159	7 ULC, 1.5 DEAD + 1.5 LIVE	1.867	-5.153	2.083	5.863	0	0	-0.001
Max Z	139	20 ULC, 1.5 DEAD + 1.5 WIND (4)	-0.247	-2.148	2.936	3.646	0	0	0
Min Z	115	33 ULC, 0.9 DEAD + -1.5 WIND (4)	0.269	-1.942	-0.71	2.085	0	0	0
Max rX	117	7 ULC, 1.5 DEAD + 1.5 LIVE	-0.325	-2.872	1.458	3.237	0.001	0	0
Min rX	57	7 ULC, 1.5 DEAD + 1.5 LIVE	0.007	-1.738	0.224	1.752	0	0	0
Max rY	158	7 ULC, 1.5 DEAD + 1.5 LIVE	0.9	-3.983	1.357	4.303	0	0	0
Min rY	161	21 ULC, 1.5 DEAD + -1.5 WIND (1)	-0.66	-3.766	1.28	4.032	0	0	0.001
Max rZ	161	7 ULC, 1.5 DEAD + 1.5 LIVE	1.35	-4.443	1.341	4.833	0	0	0.001
Min rZ	148	7 ULC, 1.5 DEAD + 1.5 LIVE	1.616	-4.167	2.247	5.002	0	0	-0.001
Max Rst	159	7 ULC, 1.5 DEAD + 1.5 LIVE	1.867	-5.153	2.083	5.863	0	0	-0.001